

# Shutter

DATASHEET ☐ Enquiry ☐ Order

Company: \_\_\_\_\_

Address: \_\_\_\_\_

Contact person: \_\_\_\_\_


Telephone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

Quantity: \_\_\_\_\_

Delivery date: \_\_\_\_\_

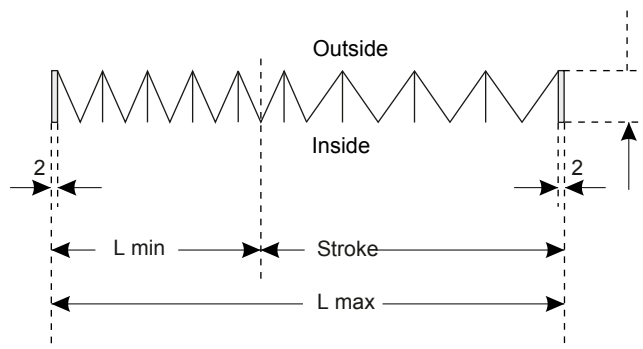

## Attachmentvariants


Examples):

- ☐ Metal-Frame
- ☐ Velcro-strip
- ☐ Plastic

## Dimension:

Exterior width	AB	=	_____	mm
max. extension	AZ	=	_____	mm
min. compression	ZD	=	_____	mm
Fold width	FB	=	_____	mm

## Guidance

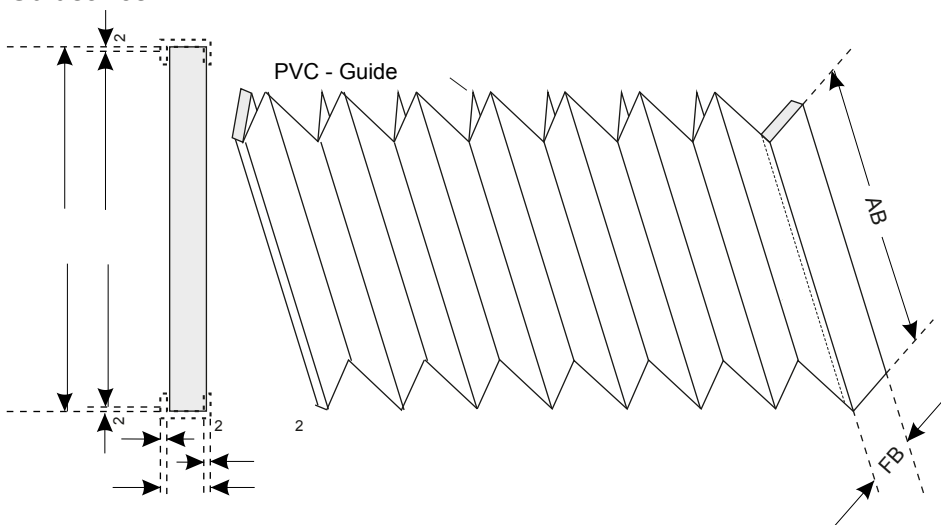

## Operating conditions:

- ☐ Interior
- ☐ Exterior
- ☐ Spray water
- ☐ Heat, Temp. \_\_\_\_\_°C
- ☐ Coolant, Type \_\_\_\_\_
- ☐ Oil, Type \_\_\_\_\_
- ☐ Acids
- ☐ Alkaline
- ☐ Welding spray
- ☐ Dust, sand
- ☐ Shavings, Temp. \_\_\_\_\_°C


## Installation:

- ☐ Horizontal
- ☐ Vertical
- Angle \_\_\_\_\_°


## Load:

Speed  
max. speed/min \_\_\_\_\_  
Number of strokes \_\_\_\_\_

## 1. End frame prefixed



## 2. Flange fill fold



## 3. Velcro strip

