

# Roller Cover with Case

DATASHEET ☐ Enquiry ☐ Order

Company: \_\_\_\_\_

Address: \_\_\_\_\_

Contact person: \_\_\_\_\_

Telephone: \_\_\_\_\_

Fax: \_\_\_\_\_

Email: \_\_\_\_\_

Quantity: \_\_\_\_\_

Delivery date: \_\_\_\_\_

## Case Dimension in mm

Case height: \_\_\_\_\_

Case width: \_\_\_\_\_

Band width: \_\_\_\_\_

L max: \_\_\_\_\_

L min: \_\_\_\_\_

Stroke: \_\_\_\_\_



## Other media

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## Operating conditions:

- ☐ Interior
- ☐ Exterior
- ☐ Spray water
- ☐ Heat, Temp. \_\_\_\_\_°C
- ☐ Coolant, Type \_\_\_\_\_
- ☐ Oil, Type \_\_\_\_\_
- ☐ Acids
- ☐ Alkaline
- ☐ Welding spray
- ☐ Dust, sand
- ☐ Shavings, Temp. \_\_\_\_\_°C

## Bandconnection:

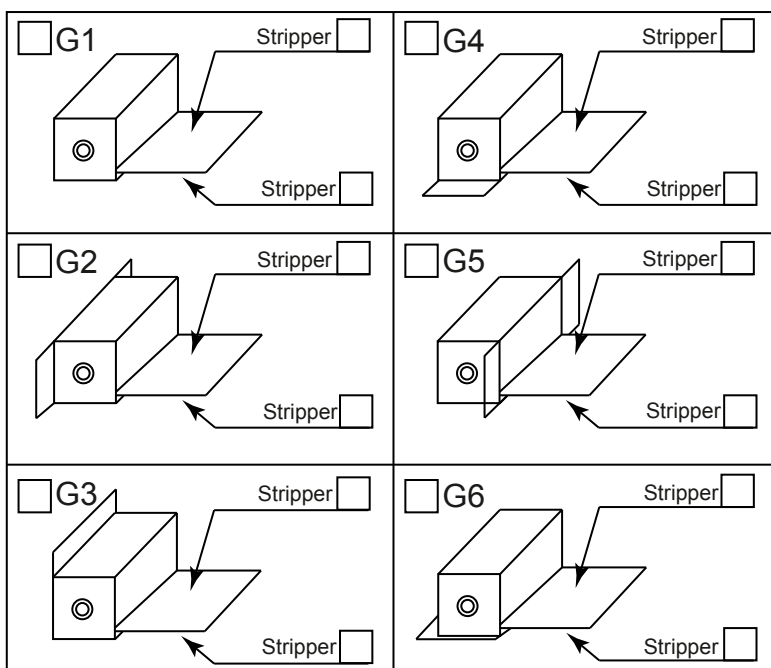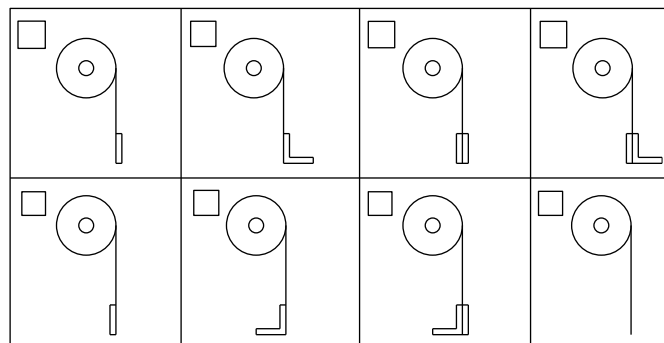

## Installation:

☐ Horizontal

☐ Vertical

☐ Tracers

Angle \_\_\_\_\_°

## Band attachment:

☐ Strip Dim.: \_\_\_\_\_

☐ Angle Dim.: \_\_\_\_\_

## Band material:

- ☐ Steel, regular
- ☐ Steel, stainless
- ☐ Plasticband
- ☐ Skirt

## Load:

Speed  
max. speed/min \_\_\_\_\_  
Number of strokes \_\_\_\_\_